


CHERRY natural Wohngefühl Palma

ALDER natural Wohngefühl Alpbach

ALDER natural Design Sillian

OAK european Design Kreativ Imst (not on stock)

OAK european Design Matriei sawn face

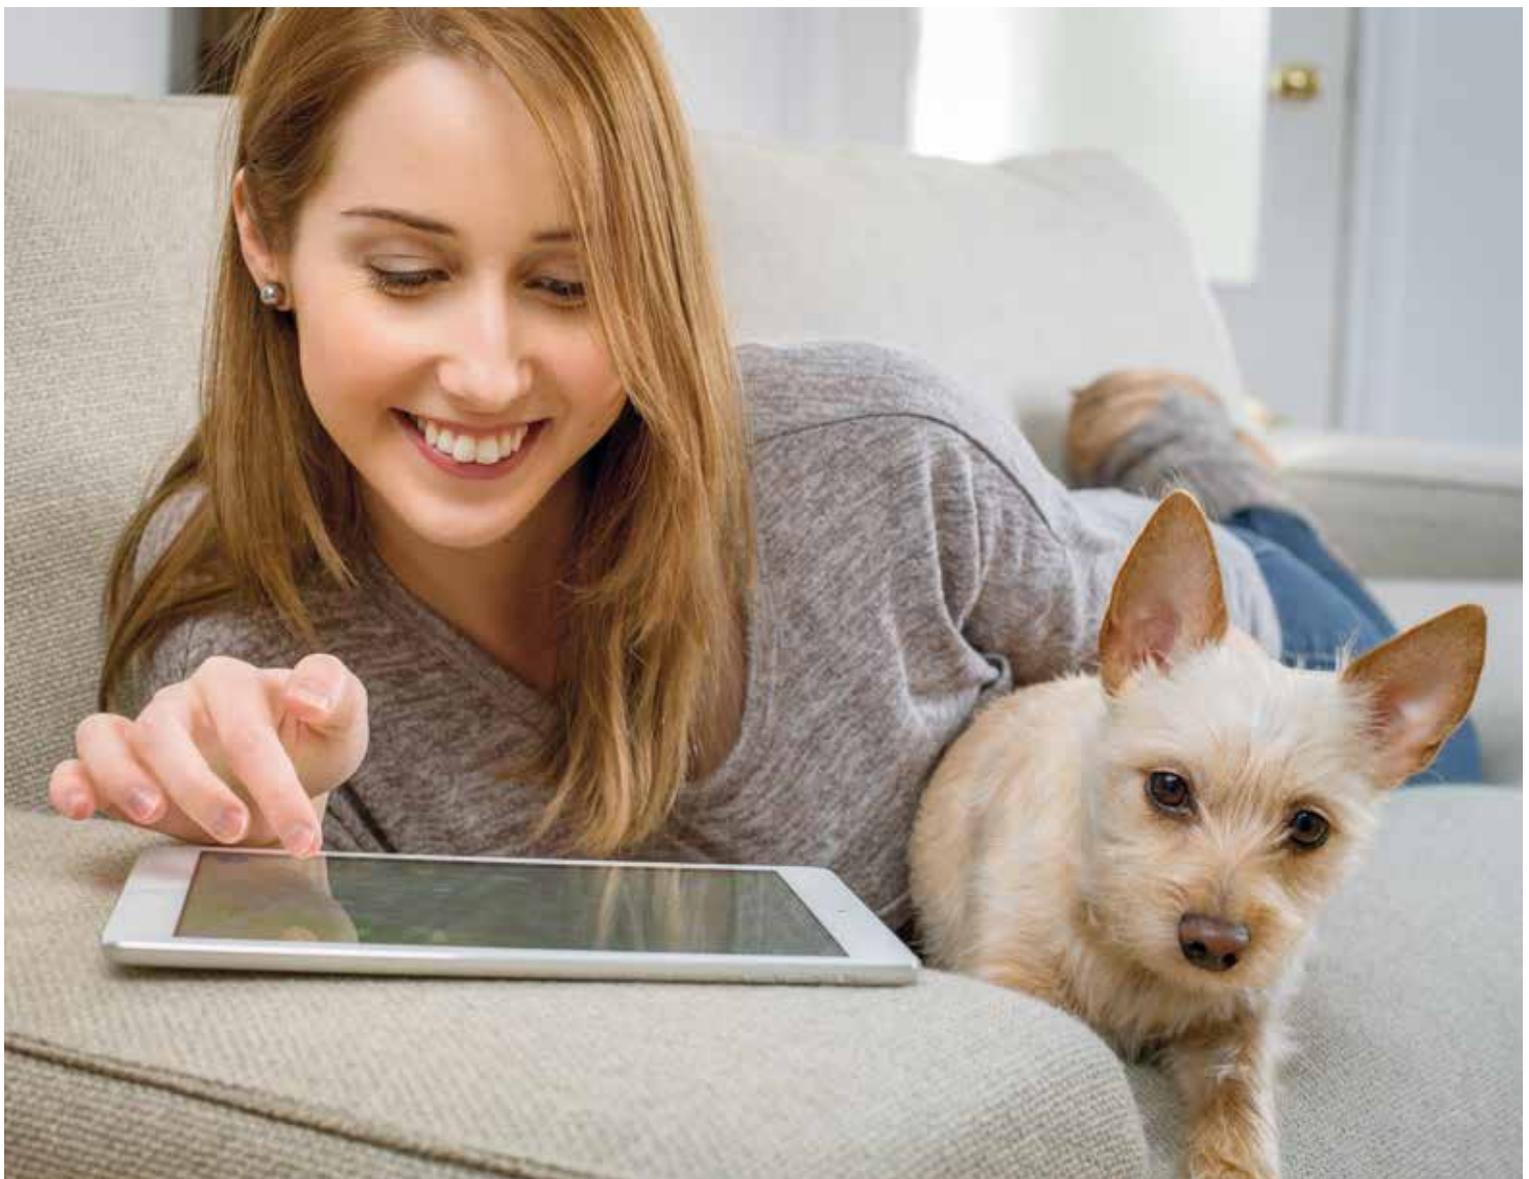

TYPES OF WOOD ALDER natural|steamed - ASH - BEECH natural|steamed - BIRCH
 BLACK WALNUT steamed - CHERRY natural|steamed - ELM steamed
 MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



LUXURY CLASS

Woodtype **CHERRY natural**

Description 3 layers of the same hardwood. The Cherry receives a silk-matt, slightly reddish to slightly yellow to greenish colour. The sorting Wohngefühl is knotty, with a medium structure and natural colour differences.

Brinell hardness 3,5 kp
 Gross density 0,66 g | cm³

1-Strip Country House Flooring CHERRY natural Wohngefühl „Palma”



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded (on order)
- Bevel



Symbol picture - may vary in colour and structure

Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	slightly allowed (partly filled)
Curled Spots differences in structure	slightly allowed
Natural colour differences	allowed
Natural fiber orientation	to one-third allowed
Wormholes and insect-ate-spots	not allowed
Sapwood	allowed
Red or brown spots	slightly allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data		
Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	6 layers 1900 mm
	(8 layers pkg)	2 layers 950* mm
Connection Tongue and groove		
One layer 950* mm consists of 2 boards		
m² pkg. 2,28		m² pal. 111,72
kg pkg. 23		kg pal. 1127
<input checked="" type="checkbox"/> Floating laying		
<input checked="" type="checkbox"/> Glued laying		
<input checked="" type="checkbox"/> Suitable for underfloor heating		
when gluing the entire area with solvent-free adhesives		



Symbol picture - may vary in colour and structure



LUXURY CLASS

Woodtype **ALDER natural**

Description 3 layers of the same hardwood. The Alder without heartwood receives a light brown, reddish colour with decent brown colour inclusions. The sorting Wohngefühl is knotty, with a medium structure and natural colour differences.

Brinell hardness 1,7 kp
 Gross density 0,49 g | cm³

1-Strip Country House Flooring ALDER natural Wohngefühl „Alpbach”



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded (on order)
- Bevel



Symbol picture - may vary in colour and structure

Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	slightly allowed (partly filled)
Curled Spots differences in structure	slightly allowed
Natural colour differences	allowed
Natural fiber orientation	to one-third allowed
Wormholes and insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	slightly allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data		
Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	6 layers 1900 mm
	(8 layers pkg)	2 layers 950* mm
Connection Tongue and groove		
One layer 950* mm consists of 2 boards		
m² pkg. 2,28		m² pal. 111,72
kg pkg. 23		kg pal. 1127
<input checked="" type="checkbox"/> Floating laying		
<input checked="" type="checkbox"/> Glued laying		
<input checked="" type="checkbox"/> Suitable for underfloor heating		
when gluing the entire area with solvent-free adhesives		

TYPES OF WOOD ALDER natural | steamed - ASH - BEECH natural | steamed - BIRCH

BLACK WALNUT steamed - CHERRY natural | steamed - ELM steamed

MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



LUXURY CLASS

Woodtype **ALDER natural**

Description 3 layers of the same hardwood. The Alder without heartwood receives a light brown, reddish colour with decent brown colour inclusions. The sorting Design is slightly to very knotty with a lively structure and natural colour differences.


Brinell hardness 1,7 kp
Gross density 0,49 g | cm³

1-Strip Country House Flooring ALDER natural Design „Sillian”



Surfaces


- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded (on order)
- Bevel

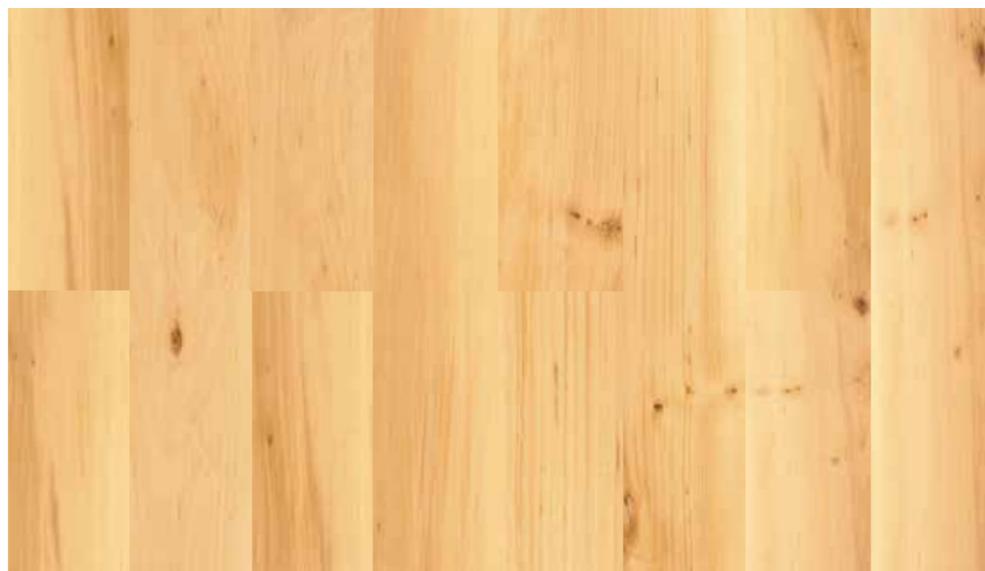

Symbol picture - may vary in colour and structure

Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	allowed (partly filled)
Curled Spots differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	allowed
Wormholes and insect-ate-spots	not allowed
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data		
Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	6 layers 1900 mm
	(8 layers pkg)	2 layers 950* mm
Connection Tongue and groove		
One layer 950* mm consists of 2 boards		
m ² pkg. 2,28		m ² pal. 111,72
kg pkg. 23		kg pal. 1127
<input checked="" type="checkbox"/> Floating laying		
<input checked="" type="checkbox"/> Glued laying		
<input checked="" type="checkbox"/> Suitable for underfloor heating		
when gluing the entire area with solvent-free adhesives		

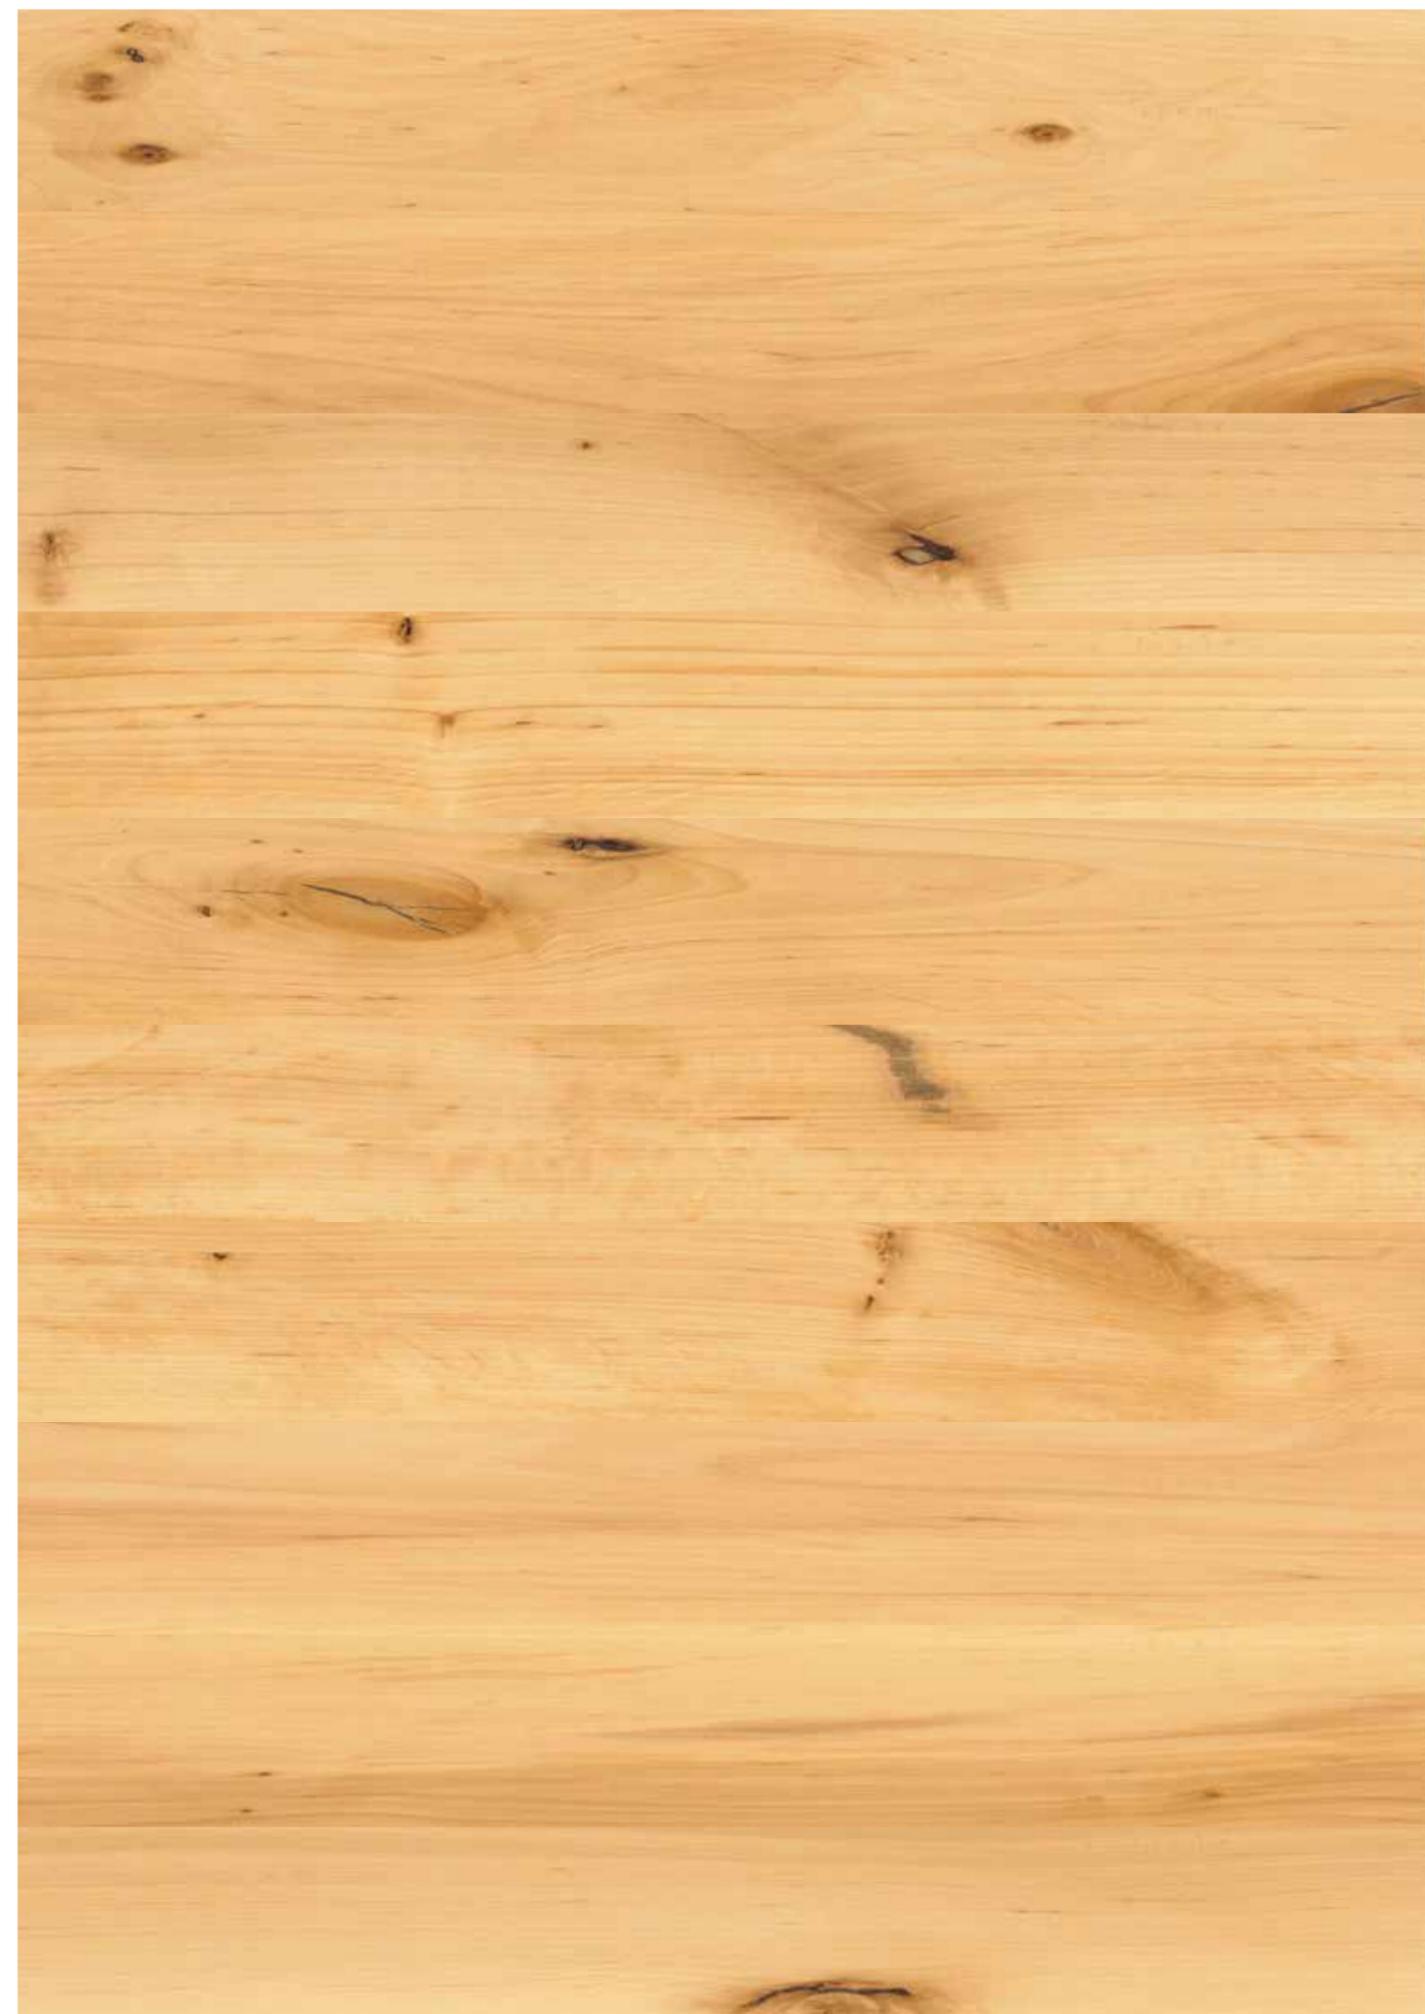

Symbol picture - may vary in colour and structure

TYPES OF WOOD ALDER natural|steamed - ASH - BEECH natural|steamed - BIRCH
 BLACK WALNUT steamed - CHERRY natural|steamed - ELM steamed
 MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



LUXURY CLASS

Woodtype	OAK european	
Description	3 layers of hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Design is slightly to very knotty, with a lively structure and natural colour differences.	
Brinell hardness	4,2 kp	The Kreative program consists of 3-layer hardwood, middle layer and under layer can vary to the top layer.
Gross density	0,71 g cm³	

1-Strip Country House Flooring OAK european Design Kreativ „lmst”



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded (on order)
- Bevel

2-Lengthsystem

According to the norms, 10,7 mm parquet must be glued from a specialized company- with a suitable glue.



Symbol picture - may vary in colour and structure

Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	allowed (partly filled)
Curled Spots differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	allowed
Wormholes and insect-ate-spots	not allowed <small>are allowed in middle layer and back layer**</small>
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data		
Thickness	10,7 mm	Useful layer approx. 3 mm
Width	150 mm	
Length	Lengthsystem	7 layers 1900 mm
		(11 layers pkg) 4 layers 950* mm
Connection	Tongue and groove <small>Due to the technical drying, there are no longer any pests, only the holes in the middle layer and back layer**</small>	
<small>One layer 950* mm consists of 2 boards</small>		
m² pkg. 3,14		m² pal. 109,90
kg pkg. 23		kg pal. 805
<input checked="" type="checkbox"/> Glued laying		
<input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>		



Symbol picture - may vary in colour and structure

TYPES OF WOOD ALDER natural|steamed - ASH - BEECH natural|steamed - BIRCH
 BLACK WALNUT steamed - CHERRY natural|steamed - ELM steamed
 MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



LUXURY CLASS

Woodtype **OAK european**

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Ambiente is slightly to very knotty, with a lively structure.

Brinell hardness 4,2 kp The Kreative program consists of 3-layer hardwood, middle
 Gross density 0,71 g | cm³ layer and under layer can vary to the top layer.

1-Strip Country House Flooring OAK Ambiente „Matrei” sawn face



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times

Sorting features:

Slightly to very knotty, natural colour differences, natural differences in structure, sawn face in different intensity and form.

A first care after the installation is mandatory.



Symbol picture - may vary in colour and structure

Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	allowed (partly filled)
Curled Spots differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	allowed
Wormholes and insect-ate-spots	not allowed <small>are allowed in middle layer and back layer**</small>
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data		
Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	6 layers 1900 mm
	(8 layers pkg)	2 layers 950* mm
Connection	Tongue and groove <small>Due to the technical drying, there are no longer any pests, only the holes in the middle layer and back layer**</small>	
<small>One layer 950* mm consists of 2 boards</small>		
m² pkg. 2,28		m² pal. 111,72
kg pkg. 23		kg pal. 1127
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>		



Symbol picture - may vary in colour and structure



„Nowadays people know the price of everything, but the value of nothing.“

Oscar Wilde

LUXURY CLASS

Our company has been working with the valuable raw material wood for more than 100 years. As a result of our intensive involvement and continuous learning processes during this time, we have developed highly innovative manufacturing techniques that distinguish the company from others by its outstanding quality, which is renowned far beyond our borders.

Thus, Bergland-Parkett was the first manufacturer to succeed in producing a 3-layered solid parquet flooring from one and the same hardwood, and in this way combining all the advantages of solid and pre-finished parquet in one product – solid hardwood and pre-finished parquet at the same time.

Our ongoing investment in the best, highly motivated staff and our modern production techniques are the guarantee of our philosophy to aim for the highest quality. In this way, Bergland-Parkett creates parquet floors that hold their value timelessly and can be used for decades. We do not only talk about sustainability, we rather live it.

Thomas Amashauffer
Managing Director

Quality has its price.
Bergland-Parkett – Your decision for long-lasting values.
Therefore, our exquisite floors are only available at
authorized Bergland-Parkett retailers.