

Woodtype	BEECH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech receives a light, slightly reddish to deep reddish brown colour. The sorting Auslese is essentially knot-free*, with a simple structure.
Brinell hardness	4,0 kp
Gross density	0,72 g cm ³

1-Strip Country House Flooring BEECH steamed Auslese "Klagenfurt"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Auslese
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	scattered allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,28</td> <td>m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>		m ² pkg. 2,28	m ² pal. 111,72	kg pkg. 23	kg pal. 1127
m ² pkg. 2,28	m ² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype	BEECH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech receives a light, slightly reddish to deep reddish brown colour. The sorting Wohngefühl is knotty, with a medium structure.
Brinell hardness	4,0 kp
Gross density	0,72 g cm ³

1-Strip Country House Flooring BEECH steamed Wohngefühl "Bregenz"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Also available as


- System board
(Fixed length 1100 mm)
- Kreativ 10,7 mm



Symbol picture - can vary in colour and structure

Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	150 mm
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>
m ² pkg.	2,28
m ² pal.	111,72
kg pkg.	23
kg pal.	1127
<input checked="" type="checkbox"/>	Floating laying
<input checked="" type="checkbox"/>	Glued laying
<input checked="" type="checkbox"/>	Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>

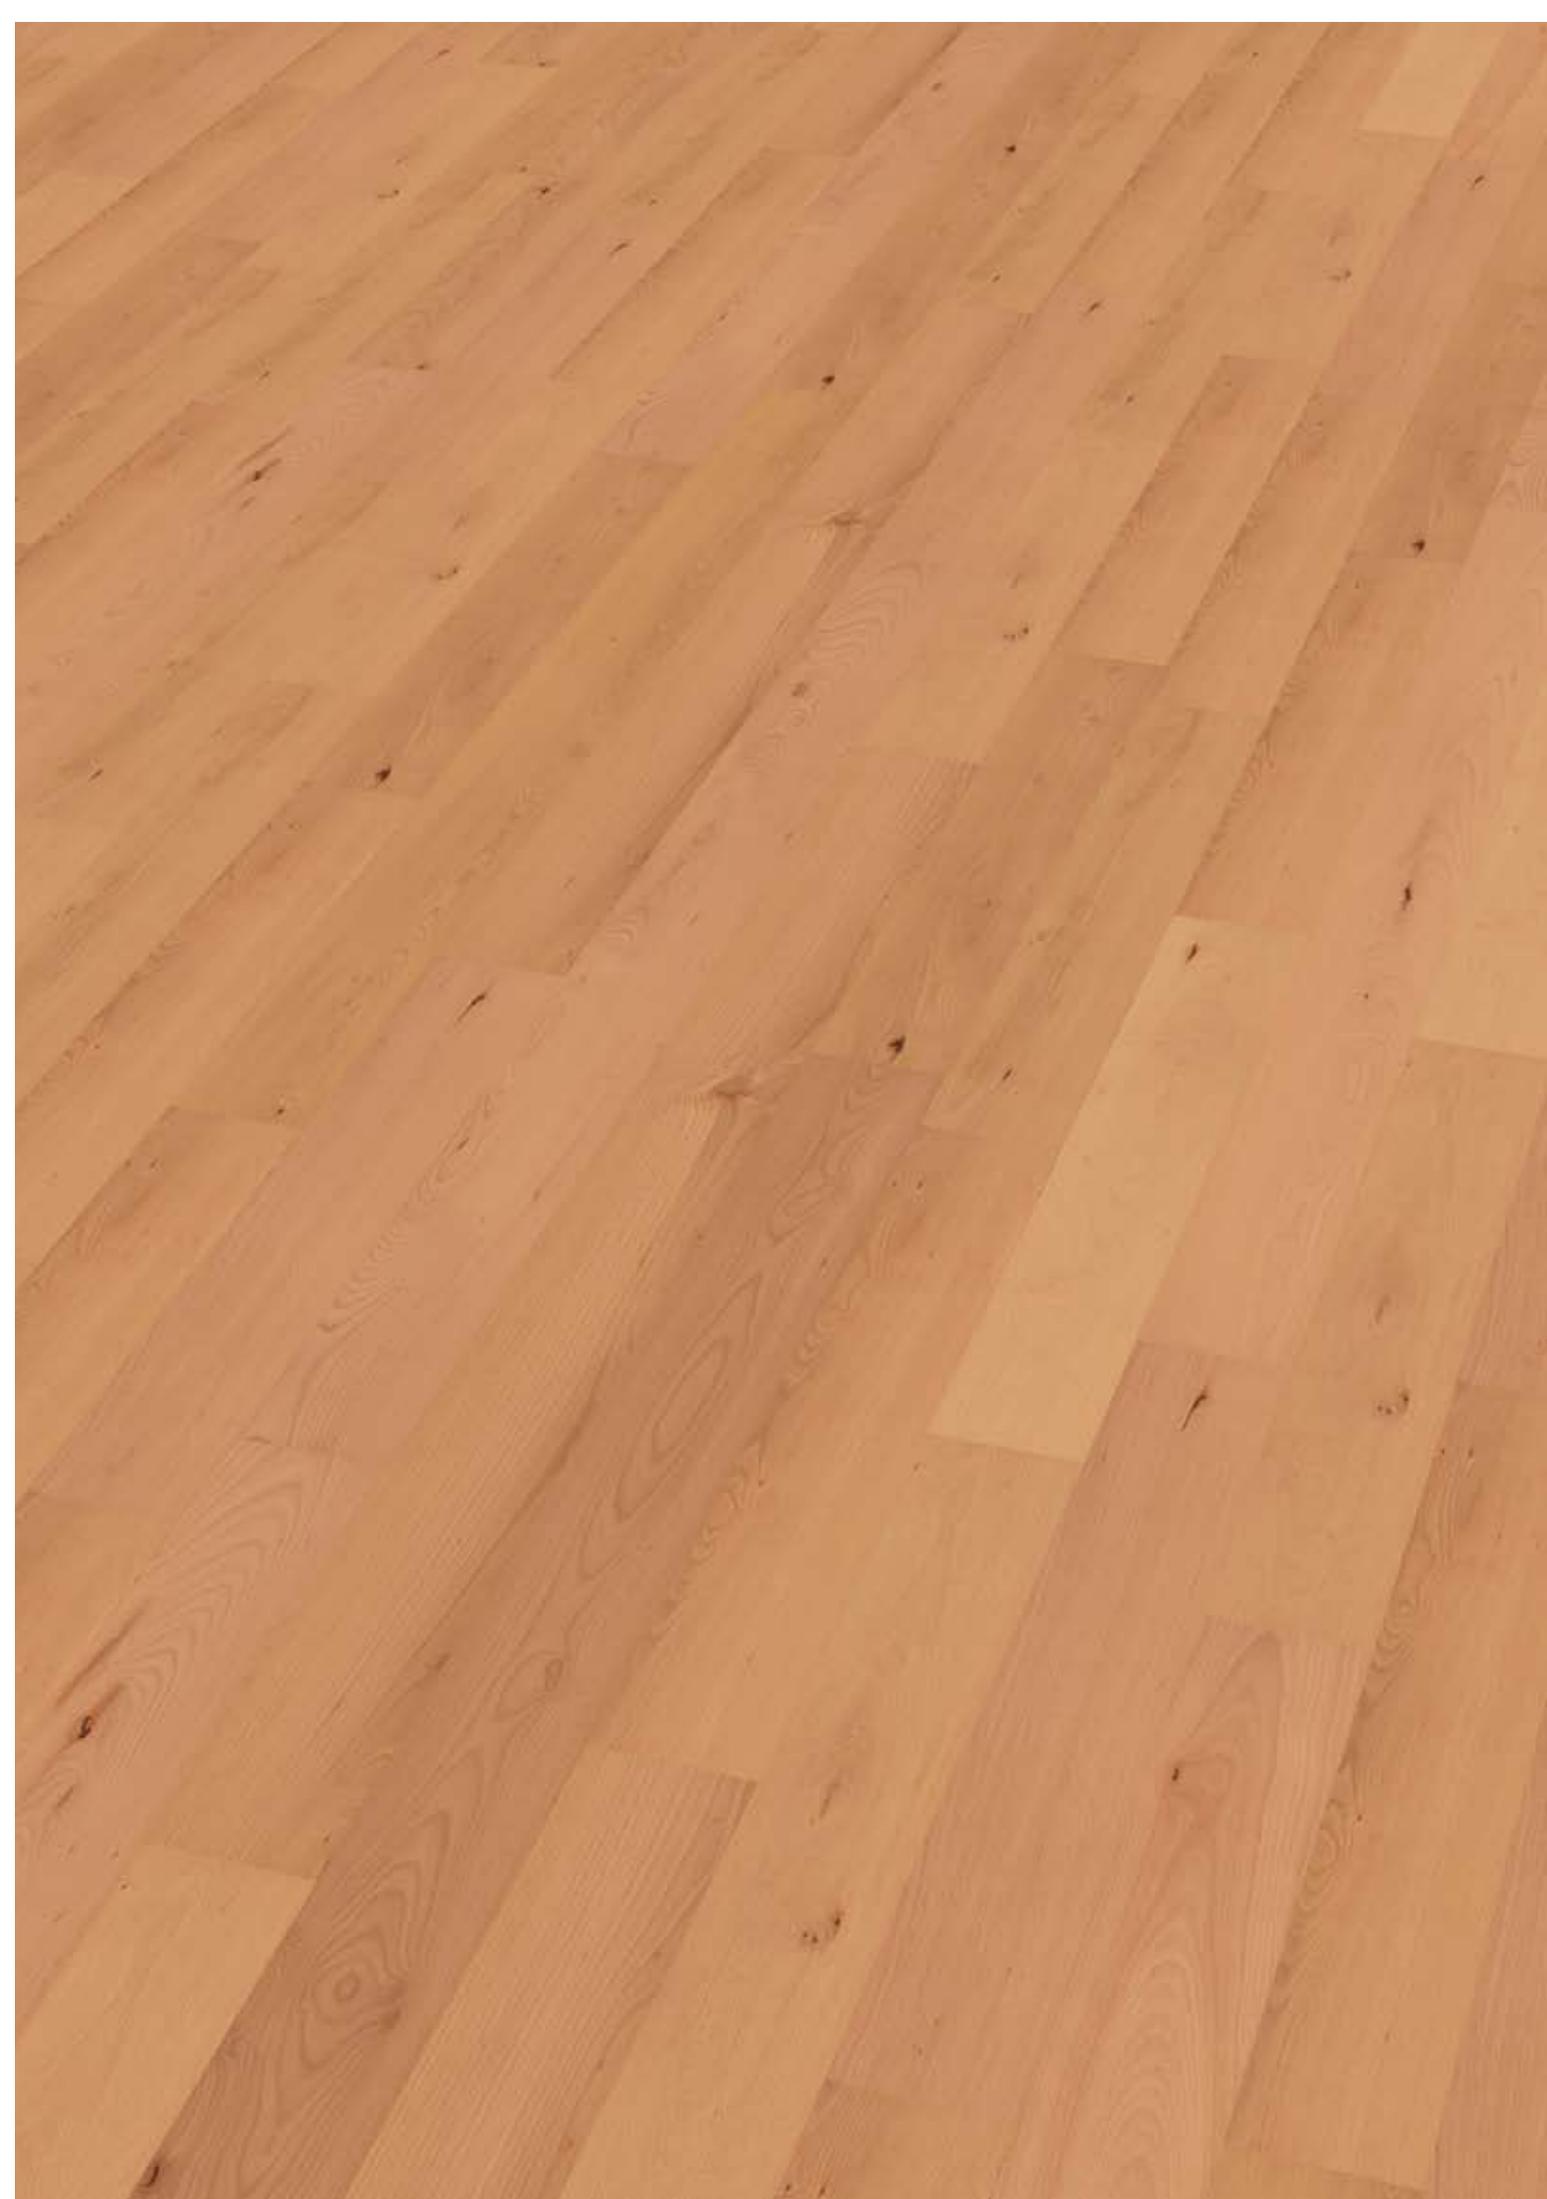

Woodtype	BEECH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech receives a light, slightly reddish to deep reddish brown colour. The sorting Design is slightly to very knotty, with a lively structure.
Brinell hardness	4,0 kp
Gross density	0,72 g cm³

1-Strip Country House Flooring BEECH steamed Design "Dornbirn"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Also available as


- Kreativ 10,7 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<ul style="list-style-type: none"> <input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small> 					

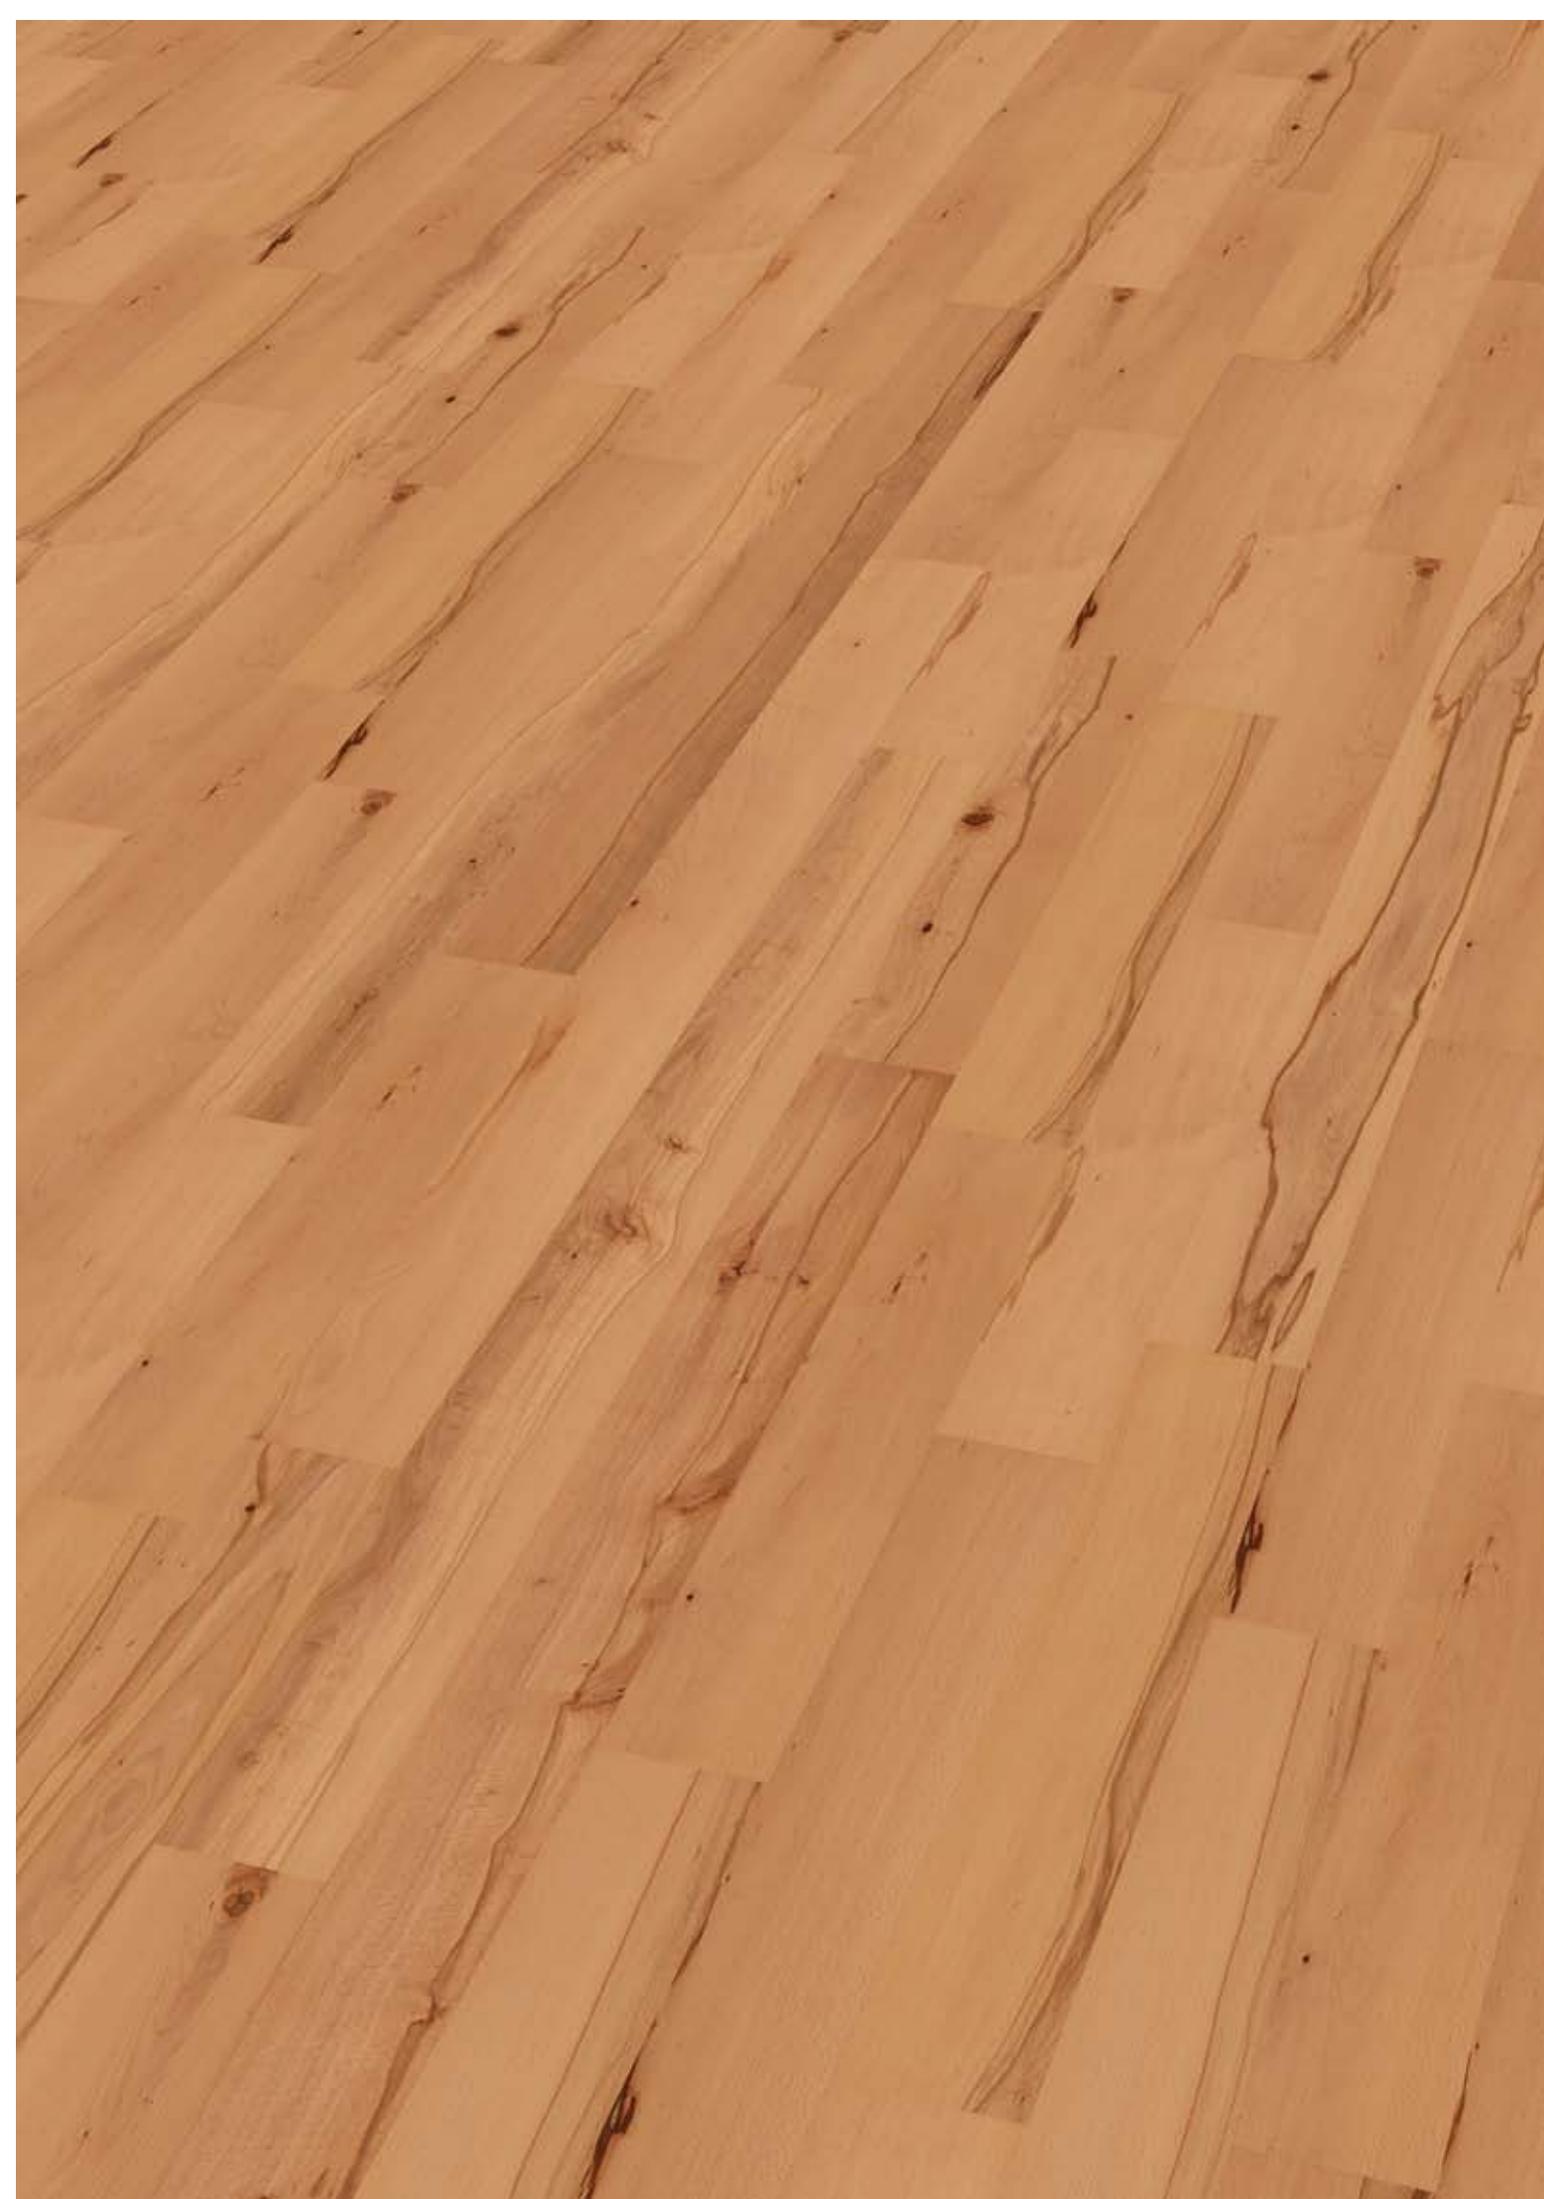

Woodtype **BEECH steamed**

Description 3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech without heartwood receives a light, slightly reddish to deep reddish brown colour. The sorting Ambiente is slightly to medium knotty, with a lively structure.

Brinell hardness 4,0 kp
 Gross density 0,72 g | cm³

1-Strip Country House Flooring BEECH steamed Ambiente City Star "Berlin"



Surfaces

- Oil | WAX oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel

Also available as


- 2-Lengthsystem
- Ladder optic
- Herringbone 950 mm
- Herringbone 475 mm



Symbol picture - may vary in colour and structure

Sorting guidelines	Ambiente
Healthy knots	fill ø 10 mm allowed (partly filled)
Black knots	fill ø 10 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	allowed

Technical data					
Thickness:	15 mm				
Width:	120 mm				
Length:	Lengthsystem* 5 layers 1900 mm (8 Layers Pkg.) 3 layers 950 mm** Lengthsystem 6 layers 950 mm** (8 Layers Pkg.) 2 layers 475 mm***				
Connection:	Nut und Feder One layer 950 mm consists of 2 boards** One layer 475 mm consists of 2 boards***				
<table border="1" style="width: 100%;"> <tr> <td>m² Pkg. 1,83* 0,91</td> <td>m² Pal. 89,67* 57,33</td> </tr> <tr> <td>kg Pkg. 18* 9</td> <td>kg Pal. 882* 567</td> </tr> </table>		m² Pkg. 1,83* 0,91	m² Pal. 89,67* 57,33	kg Pkg. 18* 9	kg Pal. 882* 567
m² Pkg. 1,83* 0,91	m² Pal. 89,67* 57,33				
kg Pkg. 18* 9	kg Pal. 882* 567				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					

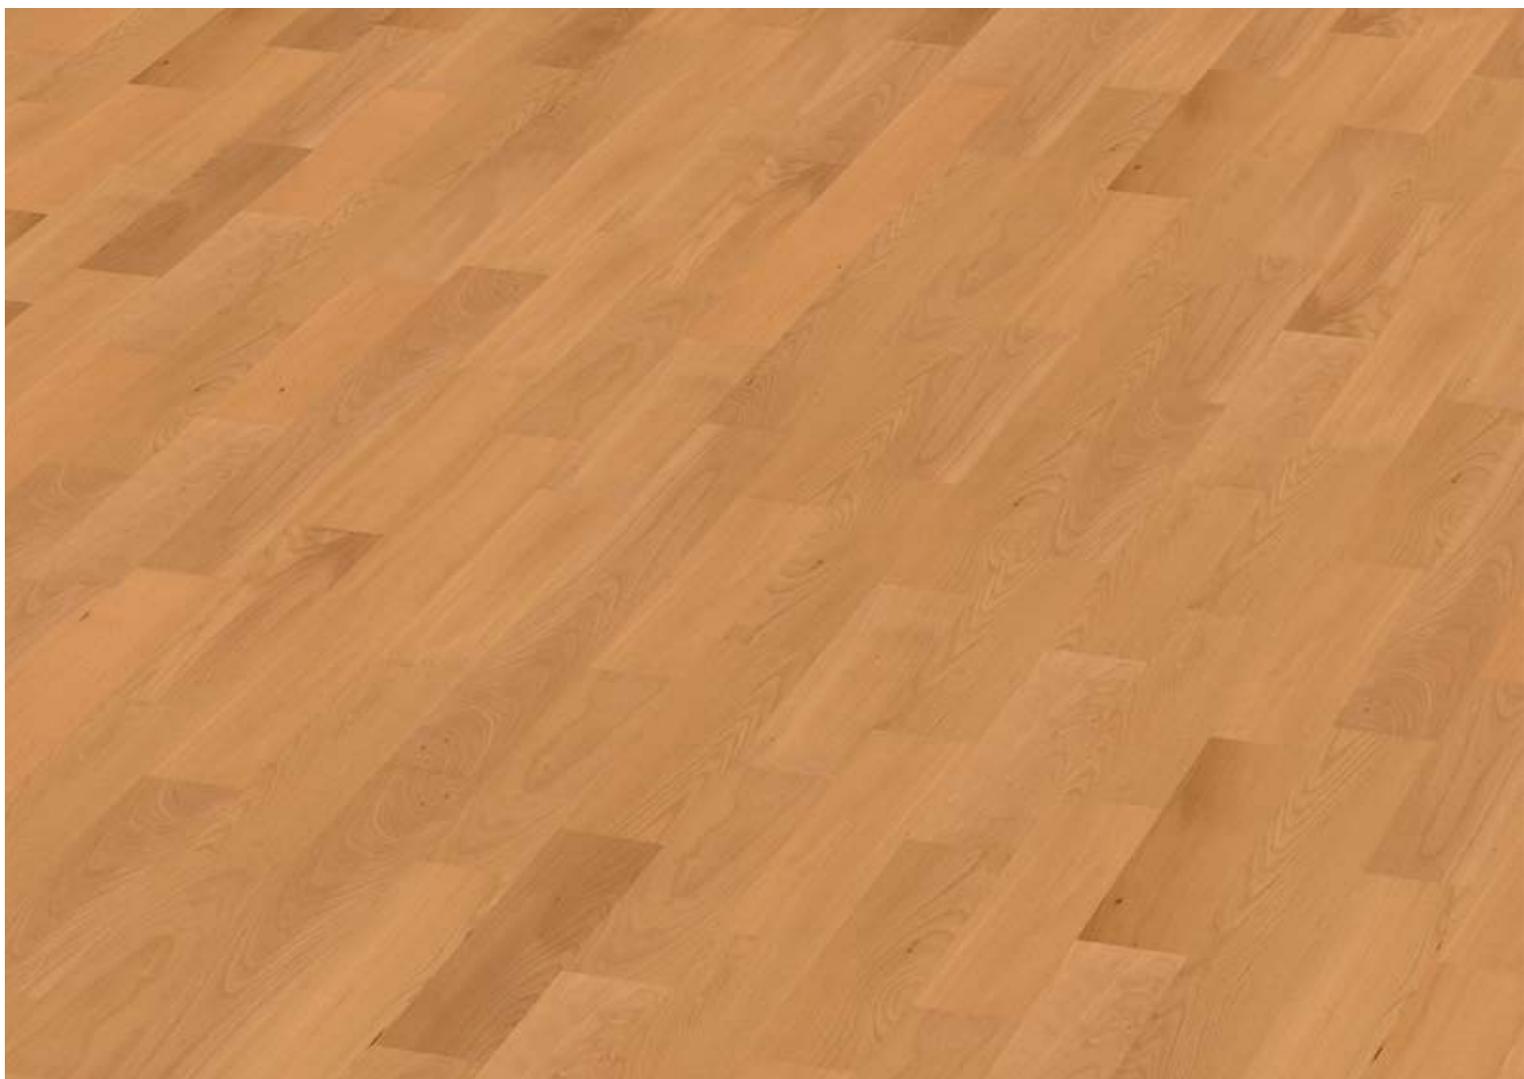

Woodtype	BEECH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech without heartwood receives a light, slightly reddish to deep reddish brown colour. The sorting Klassiker is essentially knot-free*, with a simple structure.
Brinell hardness	4,0 kp
Gross density	0,72 g cm ³

2-Strip Plank Flooring BEECH steamed "Klassiker"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel



Symbol picture - may vary in colour and structure

Sorting guidelines	Klassiker
Healthy knots	till ø 5 mm allowed
Black knots	till ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	not allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	scattered allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	140 mm				
Length:	Fixed length 2400 mm (8 layers pkg.)				
Connection:	Tongue and groove				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,69</td> <td>m² pal. 112,98</td> </tr> <tr> <td>kg pkg. 26,2</td> <td>kg pal. 1104</td> </tr> </table>		m ² pkg. 2,69	m ² pal. 112,98	kg pkg. 26,2	kg pal. 1104
m ² pkg. 2,69	m ² pal. 112,98				
kg pkg. 26,2	kg pal. 1104				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					




Woodtype	BEECH steamed
Description	3 layers of the same hardwood. Due to the steaming with vitalized Grander water, the Beech without heartwood receives a light, slightly reddish to deep reddish brown colour. The sorting Trend-Epoca is knotty, with a lively structure.
Brinell hardness	4,0 kp
Gross density	0,72 g cm ³

2-Strip Plank Flooring BEECH steamed "Trend-Epoca"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel

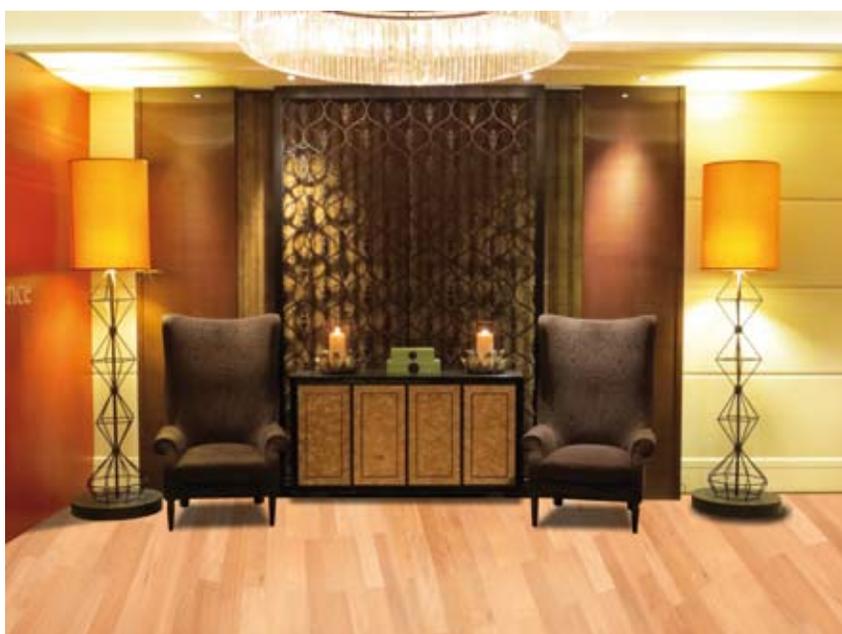

Symbol picture - may vary in colour and structure

Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	140 mm				
Length:	Fixed length 2400 mm (8 layers pkg.)				
Connection:	Tongue and groove				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,69</td> <td>m² pal. 112,98</td> </tr> <tr> <td>kg pkg. 26,2</td> <td>kg pal. 1104</td> </tr> </table>		m ² pkg. 2,69	m ² pal. 112,98	kg pkg. 26,2	kg pal. 1104
m ² pkg. 2,69	m ² pal. 112,98				
kg pkg. 26,2	kg pal. 1104				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives					

