

Woodtype **MAPLE** European

Description 3 layers of the same hardwood. The Maple has a very gentle whitish to yellowish colour. The sorting Auslese is essentially knot-free*, with a simple structure.

Brinell hardness 3,2 kp
 Gross density 0,63 g | cm³

1-Strip Country House Flooring MAPLE Auslese "Salzburg"

Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Auslese
Healthy knots	fill ø 5 mm allowed
Black knots	fill ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype **MAPLE European**

Description 3 layers of the same hardwood. The Maple has a very gentle whitish to yellowish colour. The sorting Wohngefühl is knotty, with a medium structure.


Brinell hardness 3,2 kp
 Gross density 0,63 g | cm³

1-Strip Country House Flooring MAPLE Wohngefühl "Ischl"




Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Also available as

- System board (Fixed length 1100 mm)
- Kreativ 10,7 mm

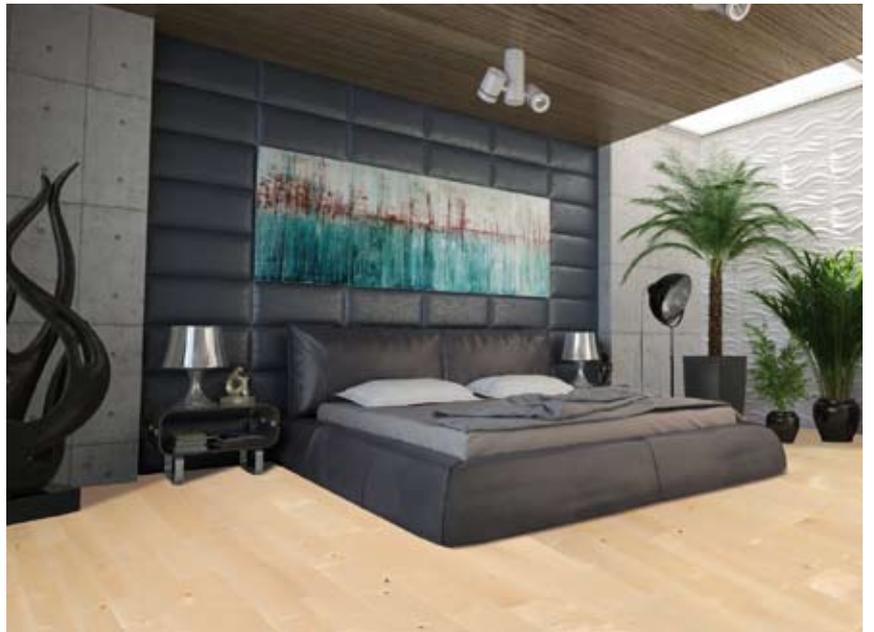

Symbol picture - may vary in colour and structure

Sorting guidelines	Wohngefühl
Healthy knots	allowed (partly filled)
Black knots	to approx. 35 mm allowed (partly filled)
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	scattered allowed (partly filled)
Curled spots differences in structure	scattered allowed
Natural differences in colour	allowed
Natural fiber orientation	to 1 3 allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	scattered allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	150 mm
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</div> <div style="border: 1px solid black; padding: 5px;">m² pal. 111,72</div> </div>	
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;">kg pkg. 23</div> <div style="border: 1px solid black; padding: 5px;">kg pal. 1127</div> </div>	
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>	



Woodtype **MAPLE** European

Description 3 layers of the same hardwood. The Maple has a very gentle whitish to yellowish colour. The sorting Design is slightly to very knotty, with a lively structure.

Brinell hardness 3,2 kp
 Gross density 0,63 g | cm³

1-Strip Country House Flooring MAPLE Design "Hallstatt"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Design
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black; padding: 5px;">m² pkg. 2,28</td> <td style="border: 1px solid black; padding: 5px;">m² pal. 111,72</td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">kg pkg. 23</td> <td style="border: 1px solid black; padding: 5px;">kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype	MAPLE European
Description	3 layers of the same hardwood. The special feature of the Maple is the naturally accrued change of colour during the aging process. Natural colour differences such as slightly greyish, slightly to very knotty, occasional fiber orientation underneath the bark etc. are part of the sorting Vintage.
Brinell hardness	3,2 kp
Gross density	0,63 g cm ³

1-Strip Country House Flooring MAPLE Vintage "Cambridge"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Sorting guidelines	Vintage
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
	<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 2,28</td> <td>m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>	m ² pkg. 2,28	m ² pal. 111,72	kg pkg. 23	kg pal. 1127
m ² pkg. 2,28	m ² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/>	Floating laying				
<input checked="" type="checkbox"/>	Glued laying				
<input checked="" type="checkbox"/>	Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>				



Woodtype **MAPLE** European, steamed

Description 3 layers of the same hardwood. Due to the steaming procedure with Grander water, the Maple receives a lively brown colour. Naturally grown features as for example colour differences, slightly to very knotty, occasional fiber orientation underneath the bark, whorls of branches etc. are part of the sorting Vintage.

Brinell hardness 3,2 kp
 Gross density 0,63 g | cm³

1-Strip Country House Flooring MAPLE steamed Vintage "Princeton"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour

Suitable for installation in a 2-widths system in combination with "Campus"



Sorting guidelines	Vintage
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	150 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm*				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">m² pkg. 2,28</td> <td style="width: 50%;">m² pal. 111,72</td> </tr> <tr> <td>kg pkg. 23</td> <td>kg pal. 1127</td> </tr> </table>		m² pkg. 2,28	m² pal. 111,72	kg pkg. 23	kg pal. 1127
m² pkg. 2,28	m² pal. 111,72				
kg pkg. 23	kg pal. 1127				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					

Woodtype **MAPLE** European, steamed

Description 3 layers of the same hardwood. Due to the steaming procedure with Grander water, the Maple receives a lively brown colour. Naturally grown features as for example colour differences, slightly to very knotty, occasional fiber orientation underneath the bark, whorls of branches etc. are part of the sorting Vintage.

Brinell hardness 3,2 kp
 Gross density 0,63 g | cm³

1-Strip Country House Flooring MAPLE steamed Vintage "Campus"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour

Suitable for laying in a 2-widths system in combination with "Princeton"



Sorting guidelines	Vintage
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data					
Thickness:	15 mm Useful layer: approx. 5 mm				
Width:	120 mm				
Length:	Lengthsystem 6 layers 1900 mm (8 layers pkg.) 2 layers 950 mm				
Connection:	Tongue and groove <small>One layer 950 mm consists of 2 boards*</small>				
<table border="1" style="width: 100%;"> <tr> <td>m² pkg. 1,83</td> <td>m² pal. 89,67</td> </tr> <tr> <td>kg pkg. 18</td> <td>kg pal. 882</td> </tr> </table>		m² pkg. 1,83	m² pal. 89,67	kg pkg. 18	kg pal. 882
m² pkg. 1,83	m² pal. 89,67				
kg pkg. 18	kg pal. 882				
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating <small>when gluing the entire area with solvent-free adhesives</small>					



Woodtype	MAPLE European
Description	3 layers of the same hardwood. The Maple has a very gentle whitish to yellowish colour. The sorting Klassiker is essentially knot-free*, with a simple structure.
Brinell hardness	3,2 kp
Gross density	0,63 g cm³

2-Strip Plank Flooring MAPLE "Klassiker"



Surfaces


- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Klassiker
Healthy knots	fill ø 5 mm allowed
Black knots	fill ø 5 mm allowed
Healthy red heart	not allowed
Healthy heartwood	not allowed
Cracks	not allowed
Curled spots differences in structure	scattered allowed
Natural differences in colour	slightly allowed
Natural fiber orientation	scattered allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	140 mm
Length:	Fixed length 2400 mm (8 layers Pkg.)
Connection:	Tongue and groove
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;">m² pkg. 2,69</div> <div style="border: 1px solid black; padding: 5px;">m² pal. 112,98</div> </div>	
<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px;">kg pkg. 26,2</div> <div style="border: 1px solid black; padding: 5px;">kg pal. 1104</div> </div>	
<input checked="" type="checkbox"/> Floating laying <input checked="" type="checkbox"/> Glued laying <input checked="" type="checkbox"/> Suitable for underfloor heating when gluing the entire area with solvent-free adhesives	

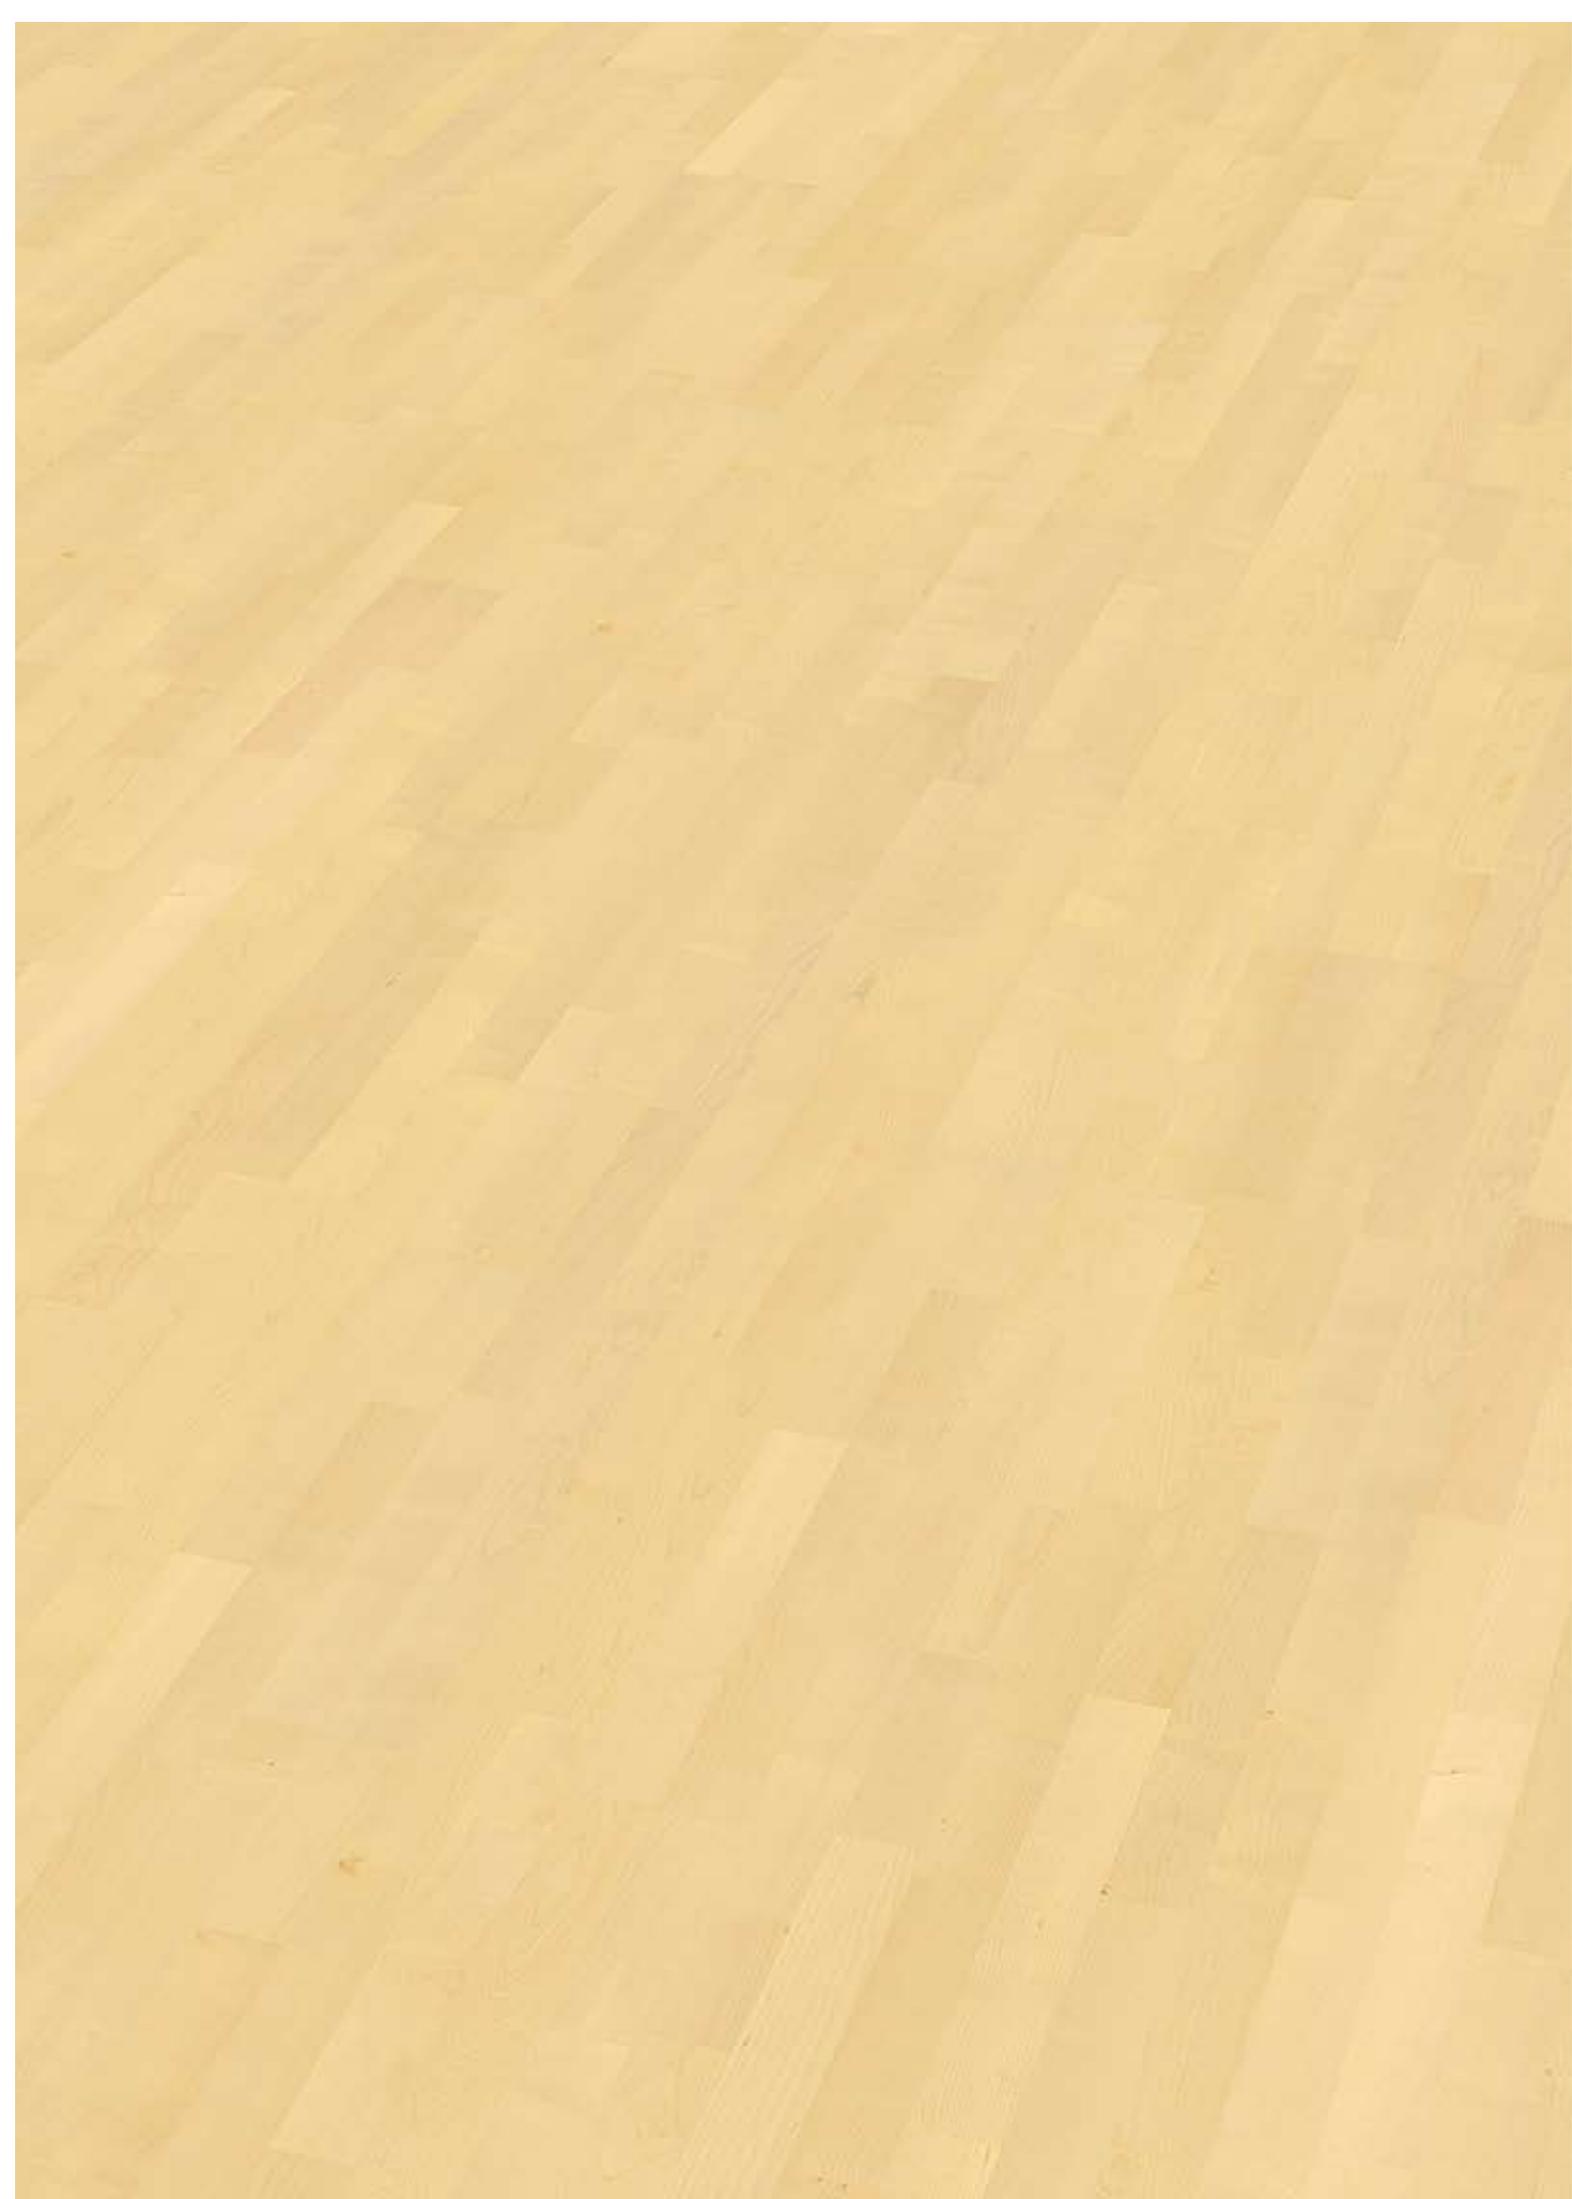

Woodtype **MAPLE** European

Description 3 layers of the same hardwood. The Maple has a very gentle whitish to yellowish colour. The sorting Trend-Epoca is knotty, with a lively structure.


Brinell hardness 3,4 kp
 Gross density 0,63 g | cm³

2-Strip Plank Flooring MAPLE "Trend-Epoca"



Surfaces

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Bevel
- Special colour



Symbol picture - may vary in colour and structure

Sorting guidelines	Trend-Epoca
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	allowed
Healthy heartwood	allowed
Cracks	allowed (partly filled)
Curled spots differences in structure	allowed
Natural differences in colour	allowed
Natural fiber orientation	allowed
Wormholes & insect-ate-spots	not allowed
Sapwood	not allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	not allowed

Technical data	
Thickness:	15 mm Useful layer: approx. 5 mm
Width:	140 mm
Length:	Fixed length 2400 mm (8 layers pkg.)
Connection	Tongue and groove
m² pkg.	2,69
m² pal.	112,98
kg pkg.	26,2
kg pal.	1104
<input checked="" type="checkbox"/> Floating laying	
<input checked="" type="checkbox"/> Glued laying	
<input checked="" type="checkbox"/> Suitable for underfloor heating	when gluing the entire area with solvent-free adhesives

