

TYPES OF WOOD ALDER natural|steamed - ASH - BEECH natural|steamed - BIRCH  
BLACK WALNUT steamed - CHERRY natural|steamed - ELM steamed  
MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



THE LUXURY CLASS


Woodtype

## OAK european

**Description** 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Auslese is essentially knot-free\*, with a simple structure.

Brinell hardness 4,2 kp  
Gross density 0,71 g | cm³

## 1-Strip Country House Flooring OAK european Auslese „Wien”

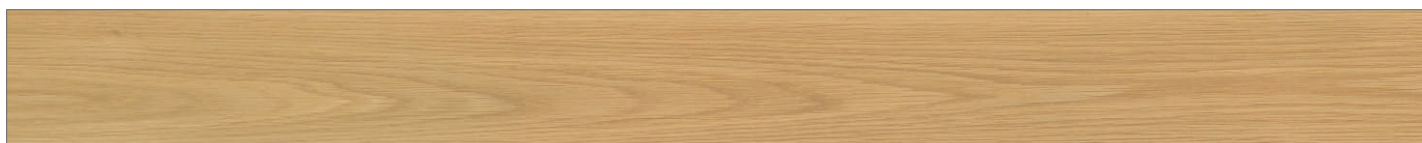

### SURFACES

- ☒ Oil | wax oxidative dried
- ☒ Varnished 7-times
- ☒ Untreated sanded
- ☒ Brushed
- ☒ Special colour



[www.bergland-parkett.at](http://www.bergland-parkett.at)

Symbol picture - may vary in colour and structure

### Sorting guidelines

Healthy knots	to approx. 5 mm allowed
Black knots	to approx. 5 mm allowed
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	not allowed
Curled Spots   differences in structure	slightly allowed
Natural colour differences	slightly allowed
Natural fiber orientation	slightly allowed
Wormholes and insect-ate-spots	not allowed <small>are allowed in middle layer and back layer**</small>
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

### Technical data

Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	5 layers 1900 mm
	(8 layers   pkg)	3 layers 950* mm

**Connection** Tongue and groove Due to the technical drying, there are no longer any pests, only the holes in the middle layer and back layer\*\*

One layer 950\* mm consists of 2 boards

m² | pkg. 2,28

m² | pal. 111,72

kg | pkg. 23

kg | pal. 1127

☒ Floating laying

☒ Glued laying

☒ Suitable for underfloor heating

when gluing the entire area with solvent-free adhesives



