


Woodtype

OAK european

Description 3 layers of the same hardwood. The European Oak has a middle brown to intensive brown colour. The sorting Design is slightly to very knotty, with a lively structure.

Brinell hardness 4,2 kp
 Gross density 0,71 g|cm³

1-Strip Country House Flooring OAK european Design „herringbone”

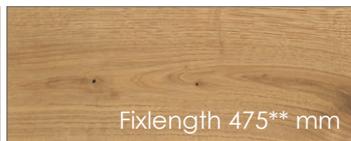

SURFACES

- Oil | wax oxidative dried
- Varnished 7-times
- Untreated sanded
- Brushed
- Bevel
- Special colour



www.bergland-parkett.at

Symbol picture - may vary in colour and structure

Sorting guidelines

Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	allowed (partly filled)
Curlted Spots differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	allowed
Wormholes and insect-ate-spots	not allowed <small>are allowed in middle layer and back layer**</small>
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data

Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	8 layers 1100* mm or (8 layers pkg) 8 layers 475** mm

Connection Tongue and groove Due to the technical drying, there are no longer any pests, only the holes in the middle layer and back layer**
 One layer 1100* mm consists of 1 board
 One layer 475** mm consists of 2 boards

m² | pkg. 1,14** | 1,32*

m² | pal. 55,90** | 64,68*

kg | pkg. 11** | 12*

kg | pal. 539** | 588*

Floating laying

Glued laying

Suitable for underfloor heating
when gluing the entire area with solvent-free adhesives

