

TYPES OF WOOD ALDER natural|steamed - ASH - BEECH natural|steamed - BIRCH
BLACK WALNUT steamed - CHERRY natural|steamed - ELM steamed
MAPLE - OAK - PEAR steamed - **SMOKED OAK** - SMOKED ZIRNOAK



THE LUXURY CLASS


Woodtype

SMOKED OAK european heart-smoked

Description 3 layers of the same hardwood. The European Oak receives a blackish-brown colour due to a special fumigation procedure. The sorting Auslese is essentially knot-free*, with a lively structure.

Brinell hardness 4,2 kp
Gross density 0,71 g | cm³

1-Strip Country House Flooring SMOKED OAK european Auslese „Mailand“

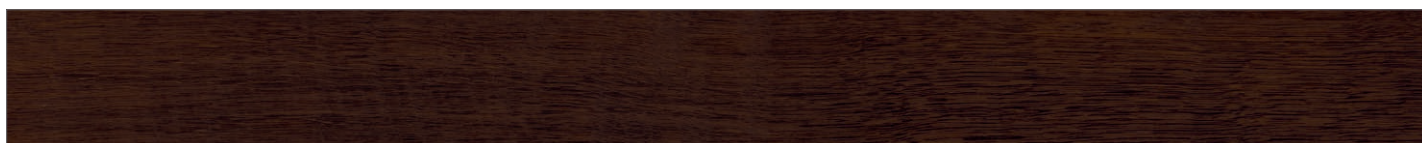

SURFACES

- ☒ Oil | wax oxidative dried
- ☒ Varnished 7-times
- ☒ Untreated sanded
- ☒ Brushed
- ☒ Bevel
- ☒ Special colour



www.bergland-parkett.at

Symbol picture - may vary in colour and structure

Sorting guidelines

Healthy knots	to approx. 8 mm allowed
Black knots	to approx. 8 mm allowed
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	not allowed
Curled Spots differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	slightly allowed
Wormholes and insect-ate-spots	not allowed <small>are allowed in middle layer and back layer**</small>
Sapwood	not allowed
Red or brown spots	not allowed
Stains from storage and light blueness	not allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

Technical data

Thickness	15 mm	Useful layer approx. 5 mm
Width	150 mm	
Length	Lengthsystem	5 layers 1900 mm
	(8 layers pkg)	3 layers 950* mm

Connection Tongue and groove Due to the technical drying, there are no longer any pests, only the holes in the middle layer and back layer**

One layer 950* mm consists of 2 boards

m² | pkg. 2,28

m² | pal. 111,72

kg | pkg. 23

kg | pal. 1127

☒ Floating laying

☒ Glued laying

☒ Suitable for underfloor heating

when gluing the entire area with solvent-free adhesives

